


Model(型號): **RKJXK8N02**

[Download PDF file](#)

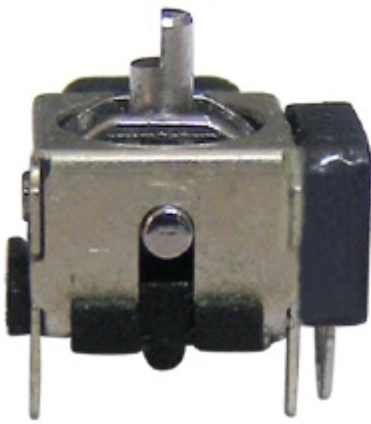


Features:(特點):

Compact design with a good space factor.
Available in a wide variety of type including standard type and lever reset type.
Constructed integral with tact switch for selection ,thus contributing to improvement in the operability of sets.

Applications(作用):

Controller for remote control of audio equipment , CD-L , VCD , TV ,car navigation system, and for game , etc .

Dimensions(規格圖):

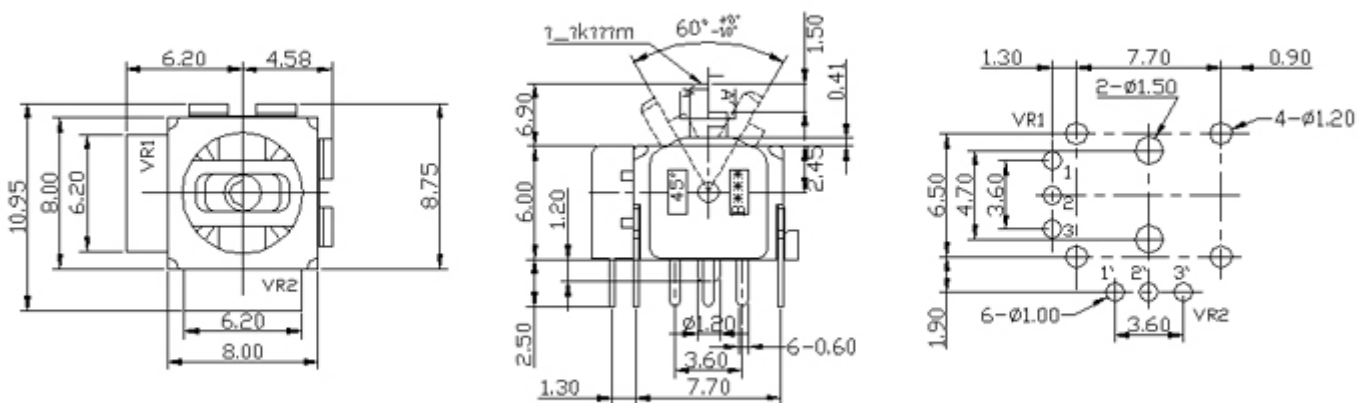

Specifications(規格)

Electrical Characteristics [電氣性能]

| | |
|--|--|
| Total resistance [全阻抗值] | 10KΩ , 50K Ω , 100KΩ |
| Total resistance tolerance [全阻抗值容許差] | ±30% |
| Ratings power(w) [額定功率] | 0.0125W, Switch 5V DC |
| Resistance taper [阻抗變化特性] | B |
| Residual resistance [殘留阻值] | 全阻值 3%Ω Max. |
| Sliding noise [滑動雜音] | 300mV Max |
| Insulation resistance [絕緣阻抗] | 100MΩ Min. at DC 250V. Switch 10MΩ Min. DC 10V |
| Withstanding voltage [耐電壓] | 1 minute at AC 250V |
| Max. operating voltage [最高使用電壓] | AC 50V |

Mechanical Characteristics [機械性能]

| | |
|------------------------------------|--------------|
| Operation torque [回轉力矩] | 150~200gf.cm |
| Rotation stopper strength [止動強度] | 3Kgf.cm Min |
| Switch Travel [開關移動量] | 0.5 mm |

Endurance Characteristics [耐久性能]

| | |
|--------------------------|----------------------------|
| Rotational life [回轉壽命] | More than 1,000,000 cycles |
|--------------------------|----------------------------|