


Model(型號): 直滑式-----S[X][X]712VA1

[▶ 下載PDF文檔](#)

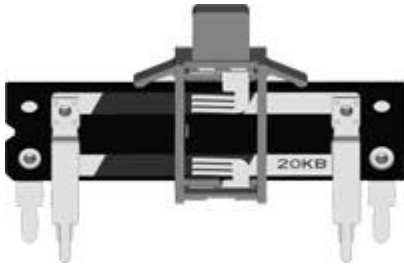


**特點:**

極佳的操作手感，用於熱控器，清晰的定位手感。用於電子樂器，平骨與濕滑的手感，低噪音，長壽命，高精確的衰減調控。

**作用:**

電子琴、混音器的聲減調控汽車空調的熱控或模式轉換測量儀器。

**Dimensions(規格圖):**

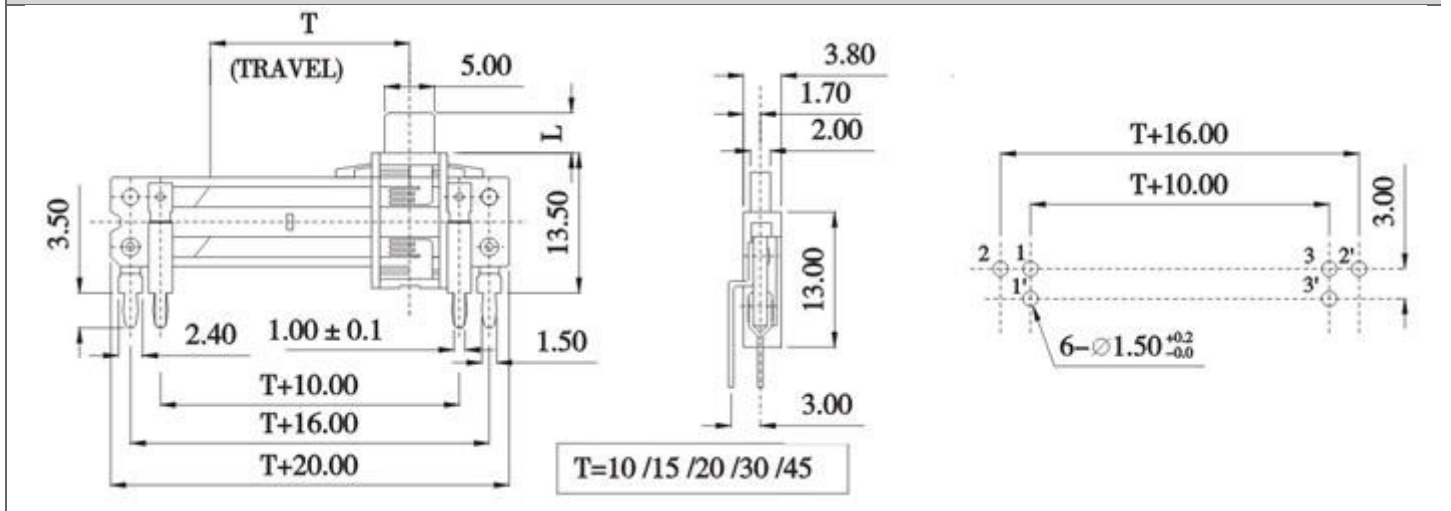

**Specifications(規格)**

**Electrical Characteristics [ 電氣性能 ]**

Total resistance [ 全阻抗值 ]	100Ω ~1MΩ
Total resistance tolerance [ 全阻抗值容許差 ]	±20%
Ratings power(w) [ 額定功率 ]	Travel 30mm B Single 0.2W,Dual 0.1W Except B single 0.1W,Dual 0.05W
Resistance taper [ 阻抗變化特性 ]	A,B,*C,D,W
Residual resistance(1-2/2-3) [ 殘留阻值 ]	10/20 Max.
	30/50 Max.
	50/70 Max.
	100/120 Max.
	200/220 Max.
300/320 Max.	
Sliding noise [ 滑動雜音 ]	Single unit: 100mV Max,Dual unit: 150mV Max
Insulation resistance [ 絕緣阻抗 ]	10MΩ Min. at DC 250V.
Withstanding voltage [ 耐電壓 ]	1 minute at AC 250V
Max. operating voltage [ 最高使用電壓 ]	B 200V , Except B 150V
Cang error:[運動誤差]	Volume[音量] -40dB ~0dB±3dB Max
	Tone [音質] ±3dB Max. at 50% position.

**Mechanical Characteristics [ 機械性能 ]**

Operation torque [ 滑動力矩 ]	10~200gf.cm
Click slip out torque[掣子脫出力矩]	30~350gf.cm
Lever wobble[推柄搖晃]	2(2xL)/20mm Max. L=length of level
Lever push-pull strength[推拉強度]	3.0Kgf. cm Max. at 5 sec.

**Endurance Characteristics [ 耐久性能 ]**

Rotational life [ 回轉壽命 ]	More than 10,000 cycles
--------------------------	-------------------------