


Model(型號): 旋轉式-----R13A11CB1

▶ 下載PDF文檔

**特點:**


小體積，高可靠性，達到15gf.cm回轉力矩。

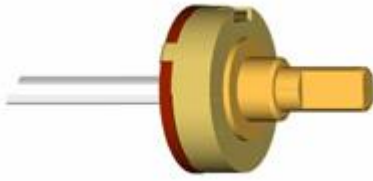

**作用:**

遙遠控制電路。

**Dimensions(規格圖):**

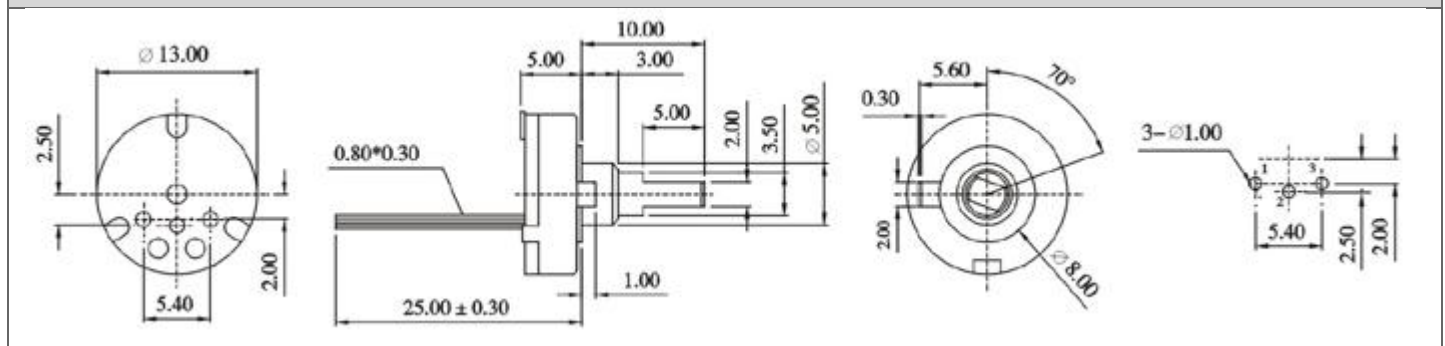

**Specifications(規格)**

**Electrical Characteristics [ 電氣性能 ]**

Total resistance [ 全阻抗值 ]	500Ω~1MΩ
Total resistance tolerance [ 全阻抗值容許差 ]	±20%
Ratings power(w) [ 額定功率 ]	B curve 0.1W,except B 0.04W
Restings taper[阻抗變化特性]	A,B,*C
Residual resistance [殘留阻值]	100Ω
Sliding noise [滑動雜音]	100mV Max.
Withstanding voltage [耐電壓]	1 minute at AC 500V
Insulation resistance [絕緣阻抗]	50MΩ Min. at DC 500V.
Withstanding voltage	1 mainute at AC 500V
Max. operating voltage [最高使用電壓]	linear Taper B AC 200V, except B AC 100V.

**Mechanical Characteristics [ 機械性能 ]**

Overall rotational angle	220 ±10°
Operation torque [ 回轉力矩 ]	10~100gf . cm
Rotation stopper strength [ 止動強度 ]	3.0Kgf . cm Min.
Push-pull strength[推 拉強度]	5.0Kgf . cm Min.

**Endurance Characteristics [ 耐久性能 ]**

Rotational life [ 回轉壽命 ]	More than100,000 cycles
--------------------------	-------------------------